



## M6 14 Series Collective Fire Detection

*The range Minerva 614 Collective Detectors include Carbon Monoxide (CO) fire, smoke and heat detectors. A unique detector park position provides a 'single visit to the ceiling' for installation, service and maintenance. The M614 Series are CSIRO ActivFire and FPANZ Listed and provide reliable fire detection technology in an attractive cost effective package.*

### Features

- Range includes unique CO fire detector
- Type A, B, C and D Heat Detector
- Low profile, discreet and unobtrusive
- Superior performance and reliability
- Patented Optical Chamber
- Attractive design
- Designed for fast, easy installation
- Detector Lock included with 5B Base
- Integral and remote alarm LED
- CSIRO ActivFire and FPANZ listed

### General

The M6 14 range of low profile collective detectors have a number of unique design features that offer improved operation, installation and ease of servicing. Through innovative design, the M6 14 series detectors have reduced the installation and servicing time to a minimum. The Park position on the detector base means only one visit to the ceiling to complete the installation.

The M6 14 range includes the unique CO fire detector, which responds to carbonaceous fires with an unprecedented early detection of slow smouldering fires, yet offers unequalled false alarm immunity.

The use of the patented optical sensing chamber, together with refined signal processing, has enabled the introduction of a smoke detector suitable for fast, reliable smoke detection of both slow and fast developing fires.

## MR6 14 Smoke Detector



The MR6 14 is capable of detecting the visible smoke produced by materials which smoulder or burn slowly, ie soft furnishings, plastic foam etc or 'smoke' produced by overheated but unburnt PVC. These detectors are particularly suitable for general applications and areas where cable overheating may occur; electrical services areas. The novel design of the asymmetrical sampling chamber and signal processing techniques stop unwanted alarms caused by very small insects. Smoke entering the sampling chamber scatters the infrared light pulses onto a photodiode. These pulses are converted to an electrical signal that is compared against a preset alarm level.

### Technical Specifications

Operating Voltage	16 to 28Vdc
Quiescent Current	100µA
Alarm Current (max)*	0.7 to 67mA (55°C) 0.7 to 60mA (70°C)
Alarm State Voltage	2.5 to 7.4V
Ext. Powered Load	50mA max. 28Vdc max.
Sensitivity	8%Obs/m (AS1603.2-1997)
Remote Indicator	E500 Mk2 Series
Relative Humidity	10% to 95% (non cond.)
Ambient Temperature	-20°C to +70°C
Dimensions (inc. base)	54 x 127 mm (H, dia)
Weight	188g with base
CSIRO ActivFire Listed	afp-1212
FPANZ Listed	VF/330

**Part Number** MR6 14

\*Max. current must be externally limited

## MU6 14 Carbon Monoxide Detector



The MU6 14 fire detector is a unique fire detector that provides very early warning of slow smouldering fires. Ideal for sleeping risks the CO fire detector is also well suited to many applications where heat detection is insufficient but smoke detection causes unwanted alarms.

As CO travels more freely than smoke the positions of CO fire detectors is more flexible.

This feature is particularly useful in large complex structures such as atria and warehouses, where positioning of smoke detectors is difficult. Although the MU6 14 has an expected life in excess of 10 years, to maintain an unparalleled level of fire detection, they should be checked for calibration within 5 years of installation.

### Technical Specifications

Operating Voltage	16 to 28Vdc
Quiescent Current	55µA (max.)
Alarm Current <sup>1</sup>	3.2 to 67mA (50°C)
Alarm State Voltage	2.5 to 7.4VDC
Alarm Threshold	38ppm CO
Ext. Powered Load	50mA max. 28Vdc max.
Remote Indicator	E500 Mk2 Series
Relative Humidity	15 to 90% (non cond.)
Ambient Temp	0 to +50°C
Dimensions (inc. base)	54 x 127 mm (H, dia)
Weight	200g with base
CSIRO ActivFire Listed	afp-1210
FPANZ Listed	VF/330

**Part Number** MU614

1. 3.2mA min. for LED visibility. Max. current must be externally limited

## MF6 14 Ionisation Smoke Detector



MF6 14 detectors are offered for old specifications which still call for ionisation smoke detectors. The MF6 14 offers detection of visible and invisible fire aerosols (products of combustion) and are therefore capable of detecting the early presence of hot smoldering and flaming fires, such as wood, paper etc. They use a dual ionisation chamber in which the air is ionised by a single radioactive source. The presence of smoke in the sampling chamber causes a change in the balance voltage, between the two chambers. This is then compared against an alarm level.

### Technical Specifications

Operating Voltage	16 to 28Vdc
Quiescent Current	105µA (max.)
Alarm Current*	0.7 to 67mA (55°C) 0.7 to 60mA (70°C)
Alarm State Voltage	2.5 to 7.4V
Ext. Powered Load	50mA max. 28Vdc max.
Ionisation Source	<33kBq (Am241)
Alarm Threshold	0.35 MIC X
Remote Indicator	E500 Mk2 Series
Relative Humidity	10% to 95% (non cond.)
Ambient Temperature	-20°C to +70°C
Weight	200g with base
CSIRO ActivFire Listed	afp-1208
FPANZ Listed	VF/330

**Part Number** MF6 14

\*3.2mA min. for LED visibility. Max. current must be externally limited

## T614 Heat Detector



Tyco T614 heat detectors use a fast response, thermistor based design. The fixed temperature sensing thermistor readily tracks the local ambient temperature, thus quickly, accurately and consistently identifying when a fixed temperature is exceeded. Rate-of-rise detection is achieved by comparing the response of two thermistors, with one having a slower thermal response. By combining accurate thermistors with proper physical placement, this patented rate-of-rise detection design achieves a high level of performance not normally available with mechanical detection.

Part Number	Model	CSIRO ActivFire Listed
T614A	Type A	afp-1513
T614B	Type B	afp-1514
T614C	Type C	afp-1515
T614D	Type D	afp-1516

### Technical Specifications

Operating Voltage	11 to 32VDC
Quiescent Current <sup>1</sup>	85µA @ 24VDC (typical)
Alarm Current <sup>2</sup>	5mA to 80mA
Alarm State Voltage <sup>3</sup>	3.0V to 12.4V
Remote Indicator	E500 Mk2 Series
Relative Humidity	10% to 95% (non cond.)
Ambient Temperature	
Types A, B	-10°C to +45°C
Types C, D	-10°C to +75°C
Storage Temperature	-10°C to +75°C
Weight	174g with base
Note: Indoor application only	

1. Max. quiescent current 110µA. 2. Min. 5mA for LED visibility; max. current must be externally limited. 3. Min. voltage with remote indicator shorted @ 5mA. Max @ 80mA without remote indicator connected.

## 5B Universal Base



The 5B Universal Base is suitable for indoor applications of the Tyco 614 series of detectors. It provides excellent space for cable access and terminations. Its larger skirt makes it suitable as a replacement for the earlier M614 base to cover any paint rims or covering a larger hole in the ceiling.

### Features

- Variety of fixing options using up to 4.8mm screws
- Remote LED connections
- Anti-tamper facility, locking device included
- Park Position disconnects detector from wiring whilst retaining detector in base.

- Compatible with base accessories including Deckhead Mount, Surface Mounting and Detector cage.

### Technical Specifications

Operating Temp.	-25°C to +75°C
Relative Humidity	10% to 95% (non cond.)
Dimensions	127 dia x 24 mm
Weight	63g
CSIRO ActivFire Listed with compatible detectors	

### Part Numbers

5B Base	517.050.017
Deckhead Mount	517.050.603
Euro Mount	517.050.604
Detector Cage	517.050.614

## Sounder Bases



The Sounder Base provides a sounder function on collective fire detection circuits. It operates independently of the detector circuit and may be used without an associated detector.

The 601SB Sounder Base requires an external 24Vdc supply and provides eight tones (including ISO 8201 T3 evacuation signal) and variable volume settings. It is identified by a green park clip.

### Technical Specifications

Operating Voltage	18 to 32Vdc
Alarm State Current	1.2mA @ 68dBA (low vol) 6.8mA @ 90dBA (max vol)
Operating Temp.	-25°C to +70°C
Relative Humidity	10% to 95% (non cond.)
Dimensions	108 dia x 38 mm
Weight	195g
Wire Size	1.5mm <sup>2</sup> to 2.5mm <sup>2</sup>
Not CSIRO ActivFire Listed	
<b>Part Number</b>	577.001.035

## SU0600 15V Manual Call Point



The SU0600 15V Manual Call Point (MCP) clamps the line voltage to 15 volts when actuated. When used on the same circuit as collective fire detectors, it complies with AS1670.1. This MCP has a plastic coated frangible element to ensure safe and reliable operation, producing no dangerous glass shards. The MCP is operated by simply pressing on the centre of the frangible element until it snaps. This releases the MCP's micro switch, which signals an alarm at the FIP and illuminates the integral LED indicator. The unit features IN and OUT terminals, which are requirements of AS1670.1 and is compatible with the MX4428 ADR-M, F3200 (band 3 Instant Alarm) and F08 version 3.

### Technical Specifications

Operating Voltage	18 to 28Vdc
Quiescent Current	5µA max. @ 24Vdc
Alarm Current*	30mA max.
Alarm Current	1mA max @ 8Vdc
Alarm Voltage	14 to 16Vdc
Reverse Polarity Current	100mA max.
Reverse Polarity Voltage	0 to 1Vdc
Ambient Temp	-10 to +70°C Indoor only
Relative Humidity	10% to 95% (non cond.)
CSIRO ActivFire Listed	afp-1385

### Part Numbers

SU0600	15V MCP (excl. backbox)
SU0602	Backbox

\*Max. current must be externally limited

## SU0601 Manual Call Point



This collective MCP is surface mounting, with a plastic coated glass element to ensure reliable, safe operation. The Tyco MCPs are available coloured red (for fire applications) or white (for EWIS applications). Note that for red coloured devices, it is necessary to order both the Housing and the Backbox. The call point is operated when the glass element is snapped, releasing the MCP's micro switch, which signals an alarm to the fire panel. The element is snapped by pressing on its centre – a hammer, or other impact device, is not required.


### Technical Specifications

Max Current @ 30VDC	Resistive 8A Inductive 3A
Contact Resistance	100mOhm. (max)
Legend	
Red MCP	Fire Pictogram
White MCP	Emergency Alarm
Ambient Temperature	-30 to +70°C
Relative Humidity	95%(non condensing)
CSIRO ActivFire Listed	afp-1329

### Part Numbers

SU0601	Red MCP (excl. backbox)
SU0602	Red Backbox
SU0608	White MCP & Backbox

## D51B Duct Sampling Unit

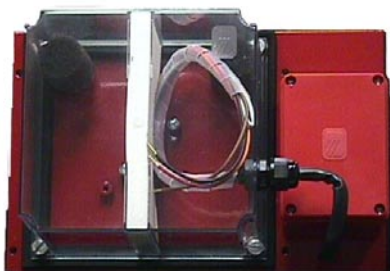

The D51B Duct Sampling Unit is used to sample air in air conditioning ducts through a suitable smoke detector. The D51B is fixed on the outside of the duct to be sampled. This allows easy access for detector servicing and replacement of the dust filter. To cater for most duct sizes, 3 metre sampling tube extensions are available. The Tyco E500 Mk2 Series Remote Indicators can be used for remote indication of an alarm. The D51B is able to accept a wide variety of bases and smoke detectors, allowing the D51B to be used with either collective or analogue addressable systems, depending on the base and detector fitted. Refer to appropriate brochure for more information on the addressable version. The DSU detailed here is available with or without the 5B base fitted.

### Technical Specifications


Duct Pressure*	-1.15 to +3.0 kPa
Duct air velocity for alarm at 8%/m Obs*	1, 2, 4, 8m/s
Sampling Tube Length	160 to 3000mm
Max. Duct Width	1.8m
Remote Indicator	E500 Mk2 Series
Not CSIRO ActivFire Listed	

### Part Numbers

D51	Without base fitted
D515B	D51 c/w 5B base
D51L	Baffle box of 10
D51F	Filter box of 10
D51T3	3m Sampling Tube
D51Z131	D51 c/w Z131 base

\*AS 1603.13-1998 test

## P136 Duct Sampling Unit

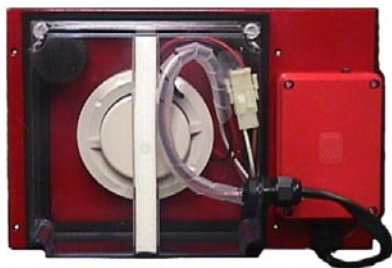

The P136 is an integrated housing and collective detector for detecting smoke in air-conditioning ducts. The detection system consists of a photoelectric smoke sensor and a separate PCB that combines non-latching trigger circuitry and field-wiring termination.

### Part Numbers

P136	Non-latching DSU
D51L	Baffle box of 10
D51F	Filter box of 10
D51T3	3m Sampling Tube

### Technical Specifications

Operating Voltage	15 to 28 VDC
Quiescent Current	500µA max. @ 24VDC
Alarm Current	3mA to 60mA
Alarm Voltage	10.5 to 12.5VDC
Reverse Polarity Current	100mA max
Reverse Polarity Voltage	0 to 1VDC
Ambient Temperature	-5°C to +45°C
Relative Humidity	10% to 95% (non cond.)
Max. Duct Width	1.8m
Sensitivity	5%Obs/m @ 4 to 64Pa differential pressure
Duct Pressure*	-1.15 to +3.0 kPa
Duct air velocity** for alarm at 8%/m Obs	1, 2, 4, 8m/s
Remote Indicator	E500 Mk2 Series
Sampling Tube Length	160 to 3000mm
CSIRO ActivFire Listed	afp-1211

\* AS 1603.13-1998 test

\*\*Complies with AS1603.13-1998 at 1 to 8m/s duct air velocity

**Simplex**  
FIRE PRODUCTS

tel: 1300 552 559

www.simplexfire.com.au

simplexfire.au@tycoint.com

Tyco reserve the right to alter specifications without notice in line with their policy of continuous product improvement.

A **tyco** COMPANY