

Features

Compact air duct sensor housing with clear cover to monitor for the presence of smoke**
Includes factory installed TrueAlarm photoelectric smoke sensor and features:**

- Individual sensor information processed by the host control panel to determine sensor status
- Digital transmission of analog sensor values via MAPNET II® or IDNet™, 2-wire communications†
- Programmable sensitivity, consistent accuracy, environmental compensation, status testing, and monitoring of sensor dirt accumulation

Model 4098-9755:

- Basic duct sensor housing (no relay output) powered by MAPNET II/IDNet communications

Model 4098-9756:

- Duct sensor housing with supervised output for multiple remote relays, requires separate 24 VDC
- Relay output is under panel control
- At the panel, relay output can be activated manually or in response to a separate alarm or other input

General features:

- UL listed to Standard 268A
- Clear cover allows visual inspection
- Test ports provide functional smoke testing access with cover in place
- Mounts to rectangular ducts or round ducts (minimum size 8" square or 18" diameter)
- Magnetic test feature for alarm initiation at housing
- Optional weatherproof enclosure is available separately (refer to data sheet S4098-0032)

Diagnostic LEDs (on interface board):

- Red Alarm/Trouble LED for sensor status and communications polling display
- Yellow LED for open or shorted trouble indication of supervised relay control (4098-9756 only)


Sampling tubes (ordered separately):

- Available in multiple lengths to match duct size
- Installed and serviced with housing in place

Remote module options (ordered separately):

- Red status/alarm LED (2098-9808)
- Test station with LED (2098-9806)
- Relays for use with 4098-9756 (4098-9843, PAM-SD)


* These products have been approved by the California State Fire Marshal (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listing 3240-0026.241 for allowable values and/or conditions concerning material presented in this document. It is subject to re-examination, revision, and possible cancellation. ULC listed models are designated with a "C" suffix such as 4098-9755C. Accepted for use - City of New York Department of Buildings - MEA35-93E. Additional listings may be applicable, contact Simplex for the latest status.

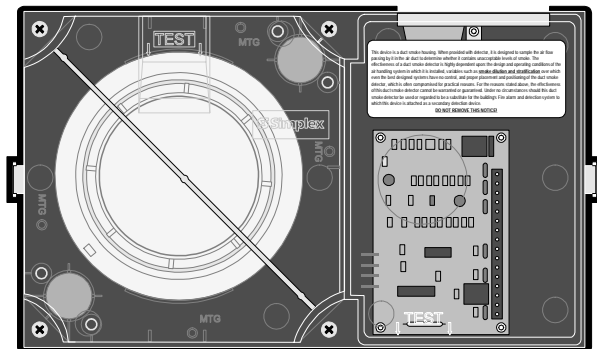

Duct Sensor Housing, Front View



2098-9808



2098-9806

Remote Status/Alarm Indicator and Test Station

Introduction

Operation. Simplex compact air duct smoke sensor housings provide TrueAlarm operation for the detection of smoke in air conditioning or ventilating ducts. Sampling tubes are installed into the duct allowing air to be directed to the smoke sensor mounted in the housing.

TrueAlarm Sensor Operation

Digital Communication of Analog Sensing.

Analog information from the sensor is digitally communicated to the control panel where it is analyzed. Sensor input is stored and tracked as an average value with an alarm or abnormal condition being determined by comparing the sensor's present value against its average.

Intelligent Data Evaluation. Monitoring each photoelectric sensor's average value provides a software filtering process that compensates for environmental factors (dust, dirt, etc.) and component aging, providing an accurate reference for evaluating new activity. The result is a significant reduction in the probability of false or nuisance alarms caused by shifts in sensitivity, either up or down.

** Please note that smoke detection in air ducts is intended to provide notification of the presence of smoke *in the duct*. It is not intended to, and will not, replace smoke detection requirements for open areas or other non-duct applications.

† TrueAlarm sensors and MAPNET and IDNet communications are protected by one or more of the following U.S. Patents: 5,155,468; 5,173,683; 5,543,777; 5,400,014; 5,552,765; 5,552,763; 4,796,025; DES. 377,460.

TrueAlarm Sensor Operation (Continued)

Control Panel Selection. Peak activity per sensor is stored to assist in evaluating specific locations. The alarm set point for each sensor is determined at the control panel, selectable as the individual application requires.

Sensor Status LED. Each sensor housing's red status LED (located on the electrical interface board) pulses to indicate communications with the panel. If the control panel determines that a sensor is in alarm, or that it is dirty or has some other type of trouble, the details are annunciated at the control panel and that sensor housing's status LED will be turned on steadily. During a system alarm, the control panel will control the LEDs such that an LED indicating a trouble will return to pulsing to help identify any alarmed sensors. (Remote Status/Alarm LEDs track the operation of the sensor housing LED.)

Photoelectric Sensing

TrueAlarm photoelectric sensors use a stable, pulsed infrared LED light source and a silicon photodiode receiver to provide consistent and accurate low power smoke sensing.

Duct Sensor Selection Chart

Duct Smoke Sensor Housing with Photoelectric Sensor*

Model	Description	Compatibility
4098-9755	Basic duct sensor housing, operating power is supplied by either MAPNET II or IDNet communications (no relay output)	Simplex fire alarm control panel models 4010, 4020, 4100, and 4120. Also 2120 CDT if configured for MAPNET II, TrueAlarm operation
4098-9756	Duct housing with supervised multiple relay control for up to 15, 4098-9843 (PAM-SD) Relays (ordered separately), requires separate 24 VDC fire alarm power and relay end-of-line resistor	Same as above except relay operation is not compatible with 2120 CDT

Remote LED Indicator and Test Station, Select One if Required

Model	Description	Compatibility	Mounting
2098-9808	Red LED status indicator	4098-9755 4098-9756	Use single gang box, 3" H x 2" W x 2" D (76 mm x 51 mm x 51 mm)
2098-9806	Test Station with keyswitch and red LED status indicator (turning switch to "TEST" initiates alarm for system testing)		

Epoxy Encapsulated Remote Relay (wiring is 18 AWG wire leads)

Model	Description	Compatibility	Mounting
4098-9843 (PAM-SD)	Relay, single Form C (10 A @ 120 VAC), from Air Products & Controls Ltd., refer to pages 3 and 4 for additional relay information	4098-9756 only, connect up to 15	Locate relays within 3 ft (1 m) of device being controlled, per NFPA 72, Section 3-9.2.1

* Each duct housing includes an internally mounted model 4098-9714 TrueAlarm photoelectric sensor and an exhaust tube. A correctly sized sampling tube (ordered per application) is required, refer to chart below.

Sampling Tube Selection Chart, Ordered Separately Per Duct Width, Select One

Overall Duct Width	Tube Required	Suggested Cut Length
12" (305 mm)	2098-9796	1/2 in. (12.7 mm) longer than duct width
13" to 23" (330 mm to 584 mm)	2098-9804	1/2 in. (12.7 mm) longer than duct width
24" to 46" (610 mm to 1168 mm)	2098-9797	2 in. (51 mm) longer than duct width
46" to 71" (1168 mm to 1803 mm)	2098-9798	2 in. (51 mm) longer than duct width
71" to 95" (1803 mm to 2413 mm)	2098-9799	2 in. (51 mm) longer than duct width

Photoelectric Sensing (Continued)



Typically duct sensor applications require less sensitive settings (such as 2.5% per foot obscuration) due to the ducts being a relative dirty environment. However, the standard seven levels of TrueAlarm sensor sensitivity are available for each individual sensor, ranging from 0.2% to 3.7% per foot of smoke obscuration. Sensitivity is selected and monitored at the fire alarm control panel.

Fire Alarm Control Panel Features

- Individual smoke sensitivity selection
- Sensitivity monitoring that satisfies NFPA 72 sensitivity testing requirements
- Peak value logging allows accurate analysis for sensitivity selection
- Automatic, once per minute individual sensor calibration check verifies sensor integrity
- Automatic environmental compensation
- Smoke sensitivity is displayed in percent per foot
- Ability to display and print detailed sensor information in plain English language
- Relays of model 4098-9756 are under panel control for ON, OFF, or override

Duct Sensor Housing Detail Reference

NOTE: Refer to Installation Instructions 574-776 for additional detail and maintenance information.

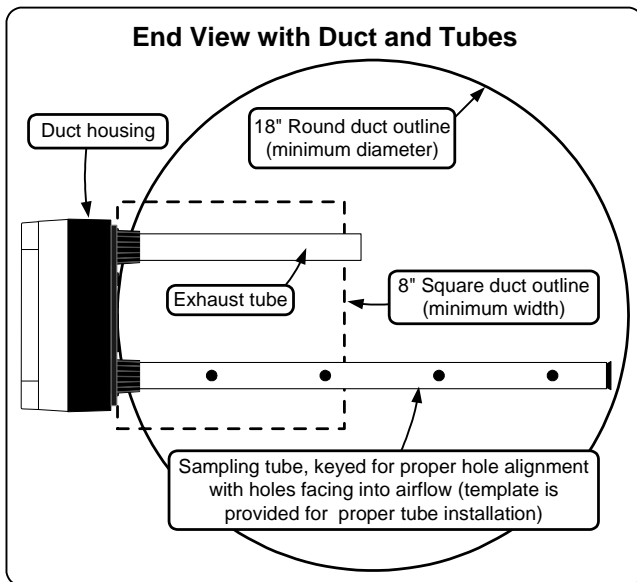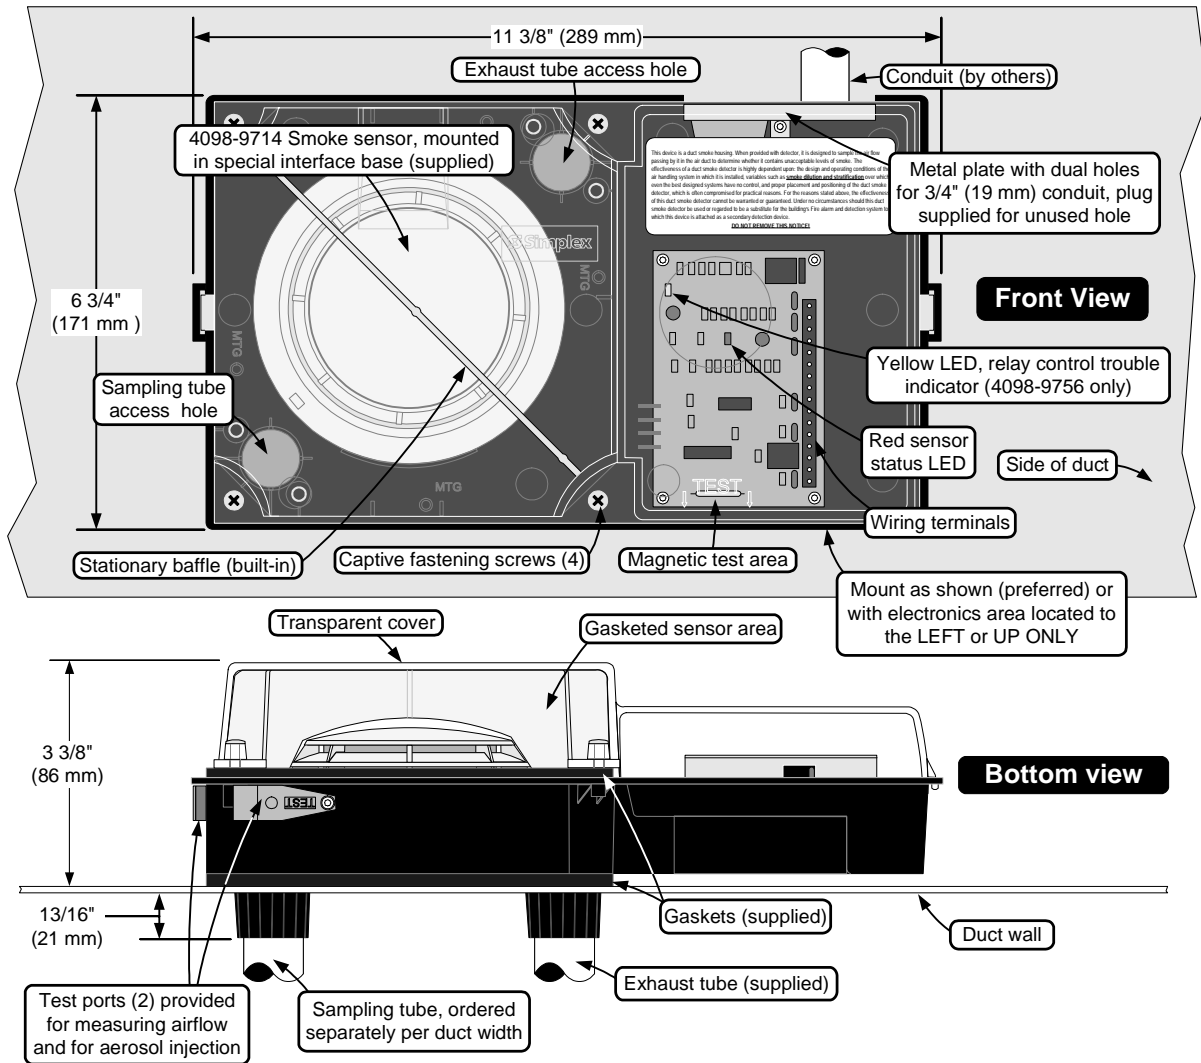


Remote Relay 4098-9843 (PAM-SD)
 (10 A @ 120 VAC, for use with 4098-9756 only)

NOTE: Mount in separate electrical box within 3 ft (1 m) of device being controlled per NFPA 72, Section 3-9.2.1

1 1/2" (38 mm) height
 1 3/16" (30 mm) width
 13/16" (21 mm) wire length

Duct Sensor Location Reference

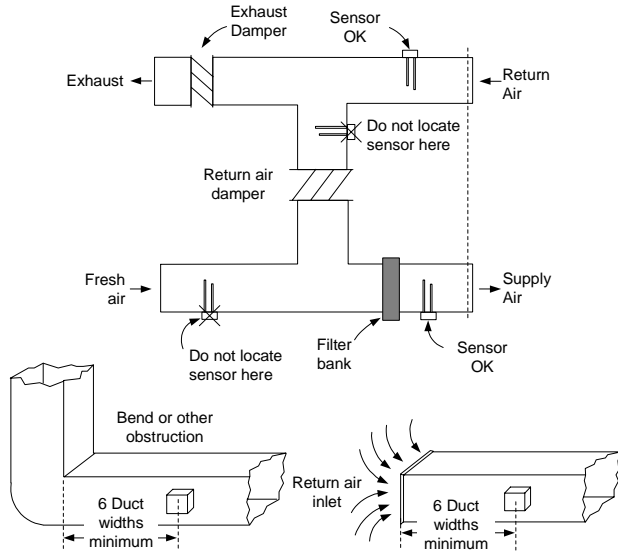

Preferred Duct Sensor Locations:

1. A minimum of six duct widths downstream from bends or inlets to avoid air turbulence.
2. On the downstream side of filters to detect fires in the filters.
3. In return ducts, ahead of mixing areas.
4. Upstream of air humidifier and cooling coil.
5. With accessibility for test and service.
6. For additional information, refer to NFPA 90A, *Standard for the Installation of Air Conditioning and Ventilating Systems*.

Locations to Avoid:

1. Where dampers closed for comfort control would interfere with airflow.
2. Next to outside air inlets (unless the intent is to monitor smoke entry from that area).
3. In return air damper branch ducts and mixing areas where airflow may be restricted.

Outdoor Applications Note:

For outdoor applications, refer to data sheet S4098-0032 for information on weatherproof enclosure 4098-9845.

Specifications

General	
Air Velocity Range (liner ft/min)	300 to 4000 ft/min (91 to 1220 m/min)
Altitude	Up to 8000 ft (2.4 km)
Sensor Sensitivity Range	0.2% to 3.7% per foot of obscuration, selectable at host control panel
UL Listed Temperature Range	32° F to 100° F (0° C to 38° C)
Operating Temperature Range	32° F to 122° F (0° C to 50° C)
Storage Temperature Range	0° F to 140° F (-18° C to 60° C)
Humidity Range	10% to 95% RH, non-condensing
Wiring Connections	Terminal blocks, 18 to 12 AWG
Housing Color	Black base with clear cover
Remote Status/Alarm LED and Test Station with Remote Status/Alarm LED	
Remote Alarm LED Current	1.2 mA, no impact to alarm current (2098-9808 or 2098-9806)
Test Station Keyswitch Current	3.3 mA, no impact to alarm current (2098-9806)
Remote Alarm LED and Test Station Distance	250 ft (76 m) maximum
Addressable Operation	
Data Communications	MAPNET II or IDNet communications, auto-select, one address per housing, provides operating power to model 4098-9755
Model 4098-9756 with Supervised Multiple Relay Control, Requires Separate Fused 24 VDC from Fire Alarm Power Supply	
Input Voltage	18-32 VDC (24 VDC nominal)
Standby Current	2.4 mA @ 24 VDC
Alarm Current	15 mA @ 24 VDC, add 15 mA additional for each 4098-9843 (PAM-SD) relay
Supervised Remote Relay Control Output	For use with relay 4098-9843 (PAM-SD), quantity of 15 maximum, distance of 500 ft (152 m) maximum, requires 10 k Ω , 1/2 W end-of-line resistor
4098-9843 (PAM-SD) Relay Output Ratings, Single Form C, use with Model 4098-9756 Only	
Coil Current	15 mA @ 24 VDC, up to 15 maximum per relay control output
Relay Contacts, Resistive Ratings	7 A @ 28 VDC; 10 A @ 120 VAC; 250 μ A @ 5 VDC
Location Distance	500 ft (152 m) maximum to relay coils, relays must be within 3 ft (1 m) of device being controlled per NFPA 72, Section 3-9.2.1

Simplex, the Simplex logo, TrueAlarm, MAPNET II, and IDNet are either registered trademarks or trademarks of Simplex Time Recorder Co. in the U.S. and/or other countries. NFPA 72 and National Fire Alarm Code are registered trademarks of the National Fire Protection Association (NFPA).